

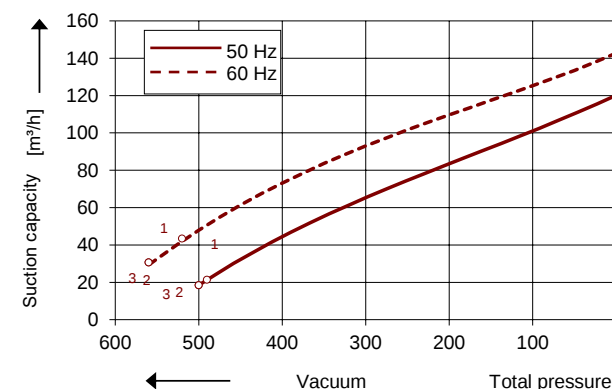
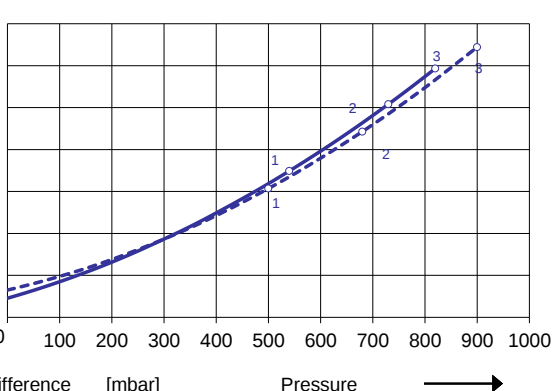
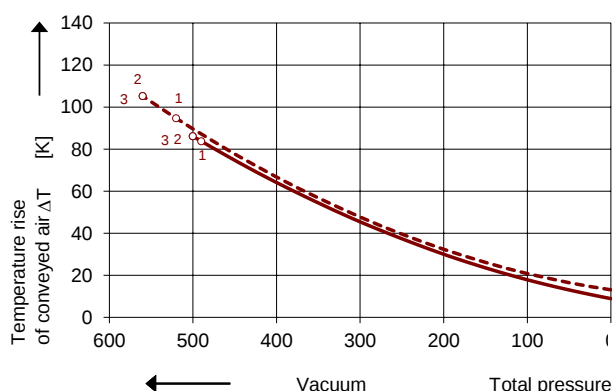
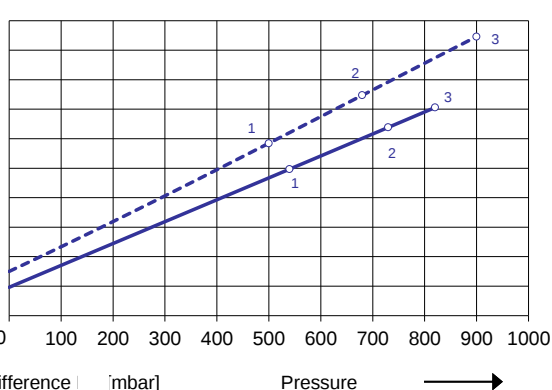


Performance curves

Vacuum operation

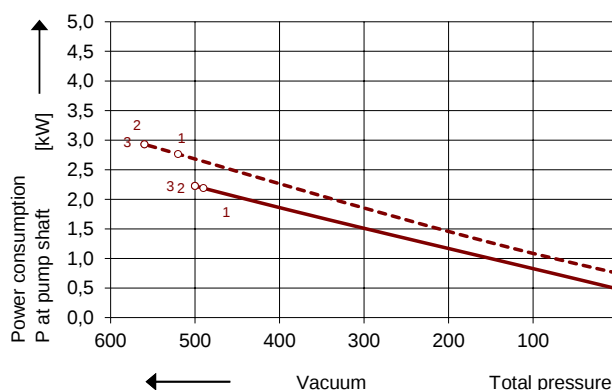

Compressor operation

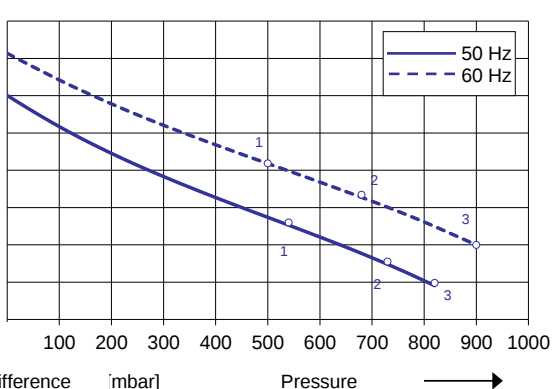

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of ± 10 %. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

Every 4RB pump can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F.

Selection and ordering data										
Type 4RB 520										
No.	Fre- quency Hz	Rated			Max. differential pressure 2)		Sound pressure level 3) dB(A)	Efficiency 0	Weight Approx. kg	Order No.
		Voltage 1)	Current	Power	Vacuum	Pressure				
		V	A	kW	mbar					
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	190-210△	9,9△	2.5	-490	540	64	IE3	50	4RB 520-0AP21-1
	60	190-210YY / 380-420 Y	12,0 YY/ 6,0Y	3,0	-520	500	68	IE3		
2	50	190-210△	13,3△	3,45	-500	730	64	IE3	54	4RB 520-0AP51-1
	60	190-210YY / 380-420 Y	15,2 YY/ 7,6 Y	4,0	-560	680	68	IE3		
3	50	190-210△	17,1△	4,6	-500	820	64	IE3	61	4RB 520-0AP71-1
	60	190-210YY / 380-420 Y	19,6 YY/ 9,8 Y	5,3	-560	900	68	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	220-240△ / 380-420 Y	8,6 △/ 5,0Y	2.5	-490	540	64	IE3	50	4RB 520-0AP26-1
	60	220-240YY / 440-480 Y	10,4YY/ 5,2 Y	3,0	-520	500	68	IE3		
2	50	220-240△ / 380-420 Y	11,6△/ 6,7Y	3,45	-500	730	64	IE3	54	4RB 520-0AP56-1
	60	220-240YY / 440-480 Y	13,2YY/ 6,6 Y	4,0	-560	680	68	IE3		
3	50	220-240△ / 380-420 Y	14,9△/ 8,6Y	4,6	-500	820	64	IE3	61	4RB 520-0AP76-1
	60	220-240YY / 440-480 Y	17,0 YY/ 8,5 Y	5,3	-560	900	68	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	380-420△ / 660-725 Y	5,0△/ 2,9 Y	2.5	-490	540	64	IE3	50	4RB 520-0AQ27-1
	60	440-480△	5,2 △	3,0	-520	500	68	IE3		
2	50	380-420△ / 660-725 Y	6,7△/ 3,9 Y	3,45	-500	730	64	IE3	54	4RB 520-0AQ57-1
	60	440-480△	6,6 △	4,0	-560	680	68	IE3		
3	50	380-420△ / 660-725 Y	8,6 △/ 5,0 Y	4,6	-500	820	64	IE3	61	4RB 520-0AQ677-1
	60	440-480△	8,5 △	5,3	-560	900	68	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	220-240△ / 380-420 Y	8,6△/ 5,0 Y	2.5	-490	540	64	IE3	50	4RB 520-0AQ26-1
	60	440-480 Y	5,2 Y	3,0	-520	500	68	IE3		
2	50	220-240△ / 380-420 Y	11,6△/ 6,7Y	3,45	-500	730	64	IE3	54	4RB 520-0AQ56-1
	60	440-480 Y	6,6 Y	4,0	-560	680	68	IE3		
3	50	220-240△ / 380-420 Y	14,9△/ 8,6Y	4,6	-500	820	64	IE3	61	4RB 520-0AQ76-1
	60	440-480 Y	8,5 Y	5,3	-560	900	68	IE3		

- 1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 500 V.
- 2) Relief valves available for limiting differential pressure.
- 3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).
- 4) The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.

All 4RB blowers match the 2006/42/EC (machinery) and 2014/35/EU (low voltage) directives and the EN 60034 norm "Rotating electrical machines".

Service factor (SF) and motor efficiency according NEMA MG1-12.

Voltage tolerances for three phase motors are +/-10%.

The frequency tolerance is +/- 2 % maximum.

Motor for alternate voltages						
Voltage range			Efficiency			
50 Hz	60Hz				60 Hz	4RB ...-0.  .  -1
3~						
200 VΔ	200 V YY / 230 VΔ / 400 VY			•		
190-210 VΔ	190-210 VYY / 220-240 VΔ / 380-420VY					
200 V YY / 230 VΔ / 400 VY	230 V YY / 460 VY			•		
190-210 VYY / 220-240 VΔ / 380-420VY	220-240 VYY / 250-280V Δ/440-480VY					
475-525 V Y	550-600 V Y			•		
475-525 VΔ	550-600 VΔ					
220-240Δ / 380-420 Y	440-480 Y			•		
380-420Δ / 660-725 Y	440-480 VΔ			•		

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown

GREENCO®
Your Ultimate Source for Vacuum and Pressure

ZHEJIANG GREENCO INDUSTRY CO LTD
Rongshi Road Danya Industrial Zone Zeguo
Town Wenling 317523 China
Tel.: +86-576-86465325
Fax: +86-576-86409555
www.greenco.cn
E-mail:greenco@greenco.cn